



60W Ext. C-Band (5.85-6.725 GHz) BUC

KEY FEATURES


- ◆ Output frequency 5.85 GHz - 6.725 GHz
- ◆ Local oscillator 4.90 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (240W max.)
- ◆ Auto-ranging powering option 80 - 240 VAC
- ◆ High power efficiency (60W min over temperature)
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal auto-sensing and controllable 10MHz high stability reference (optional)
- ◆ Power and lock status LED
- ◆ Built-in redundancy option
- ◆ Advanced M&C - combined RS-232/485 and optional FSK, Ethernet control (HTTP and SNMP ver.2 and 3)
- ◆ RoHS compliant

ABD60DC / ABD60DCF



This smallest and lightest 60W(min) L-To C-Band Block Up Converter is based on GaN technology. It could be mounted directly on a feed horn. The unit covers Standard and Palapa C-Band frequencies: 5.85-6.725 GHz.

Mechanical Drawing

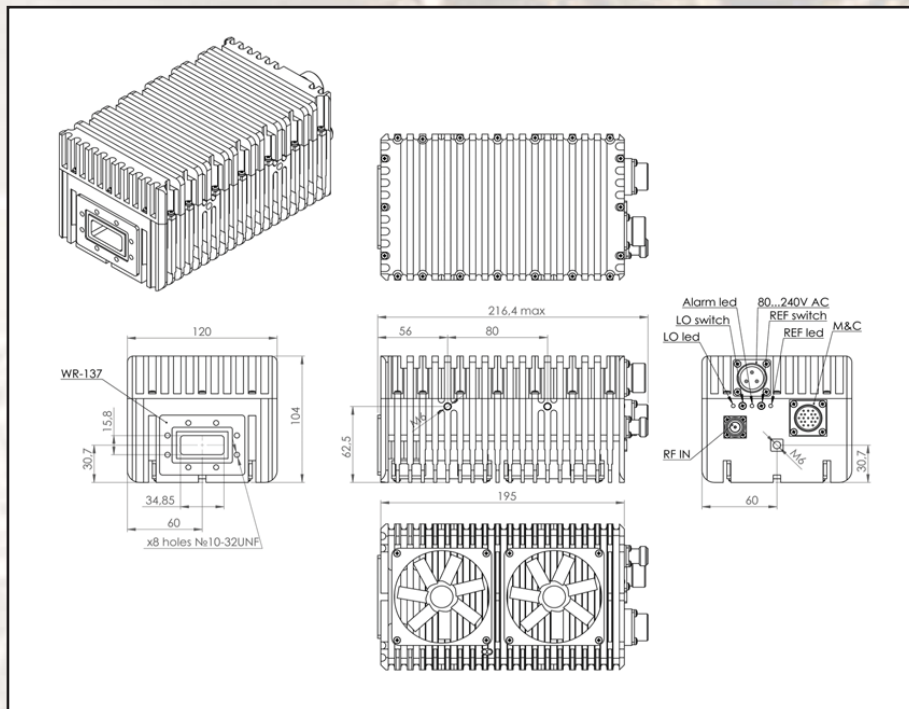



60W Ext. C-Band (5.85-6.725 GHz) BUC

TECHNICAL SPECIFICATIONS		
RF frequency		5.850 to 6.725 GHz
Local oscillator		4.90 GHz
IF frequency		950 to 1,825 MHz
Output power	@ MIN @ PLINEAR	60W typ. (+48 dBm min.) 30.4W (+44.8 dBm min.)
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		80 ~ 240 VAC, 240W max.
Output interface		CPR 137 G
Gain		70 dB nominal
IMD3		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-50 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:	frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise		-55 dBc/Hz max. @ 10 Hz
(Exceeds Intelsat's standard IESS308/309)		-65 dBc/Hz max. @ 100 Hz
		-75 dBc/Hz max. @ 1 KHz
		-85 dBc/Hz max. @ 10 KHz
		-95 dBc/Hz max. @ 100 KHz
Noise power density	Transmit Receive	-60 dBm/Hz (max.) -157 dBm/Hz (max.)
Noise figure		15 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
M&C Interface		RS-232 and RS-485, Ethernet (HTTP and SNMP ver.2 and 3)
FSK		Multiplexed on TX IFL, com. with Comtech/ Paradigm
Mute		Shut off the HPA if L.O. unlocked
Status LED	RED	Summary alarm
Amplifier	GREEN	All OK
L.O.	GREEN	All OK L.O. is set to 4.9 GHz
10MHz	GREEN	External 10MHz reference
	GREEN blinking	Internal 10MHz reference
	RED	No 10MHz reference detected
Temperature range (ambient)		
operating		-40 deg C to +55 deg C
storage		-55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
Altitude		Up to 23,000 feet
IP rating		IP67
Dimensions & housing		195 (L) x 120 (W) x 104 (H) mm 7.67"(L) x 4.72"(W) x 4.09" (H)
Weight		2.96 kg (6.5 lbs) max.