



60W Full C-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 5.850-7.05 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Double L.O. 4.9 & 5.2 GHz
- ◆ Incomparable low power consumption (189W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 2 and 3) and optional FSK
- ◆ Auto-ranging 80 - 240 VAC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABD60XC / ABD60XCF



This smallest and lightest 60W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. The unit covers all three C-Band sub-bands: Standard (5.850-6.425 GHz) and Palapa (6.365-6.725 GHz) and Insat (6.725-7.05 GHz).

Mechanical Drawing

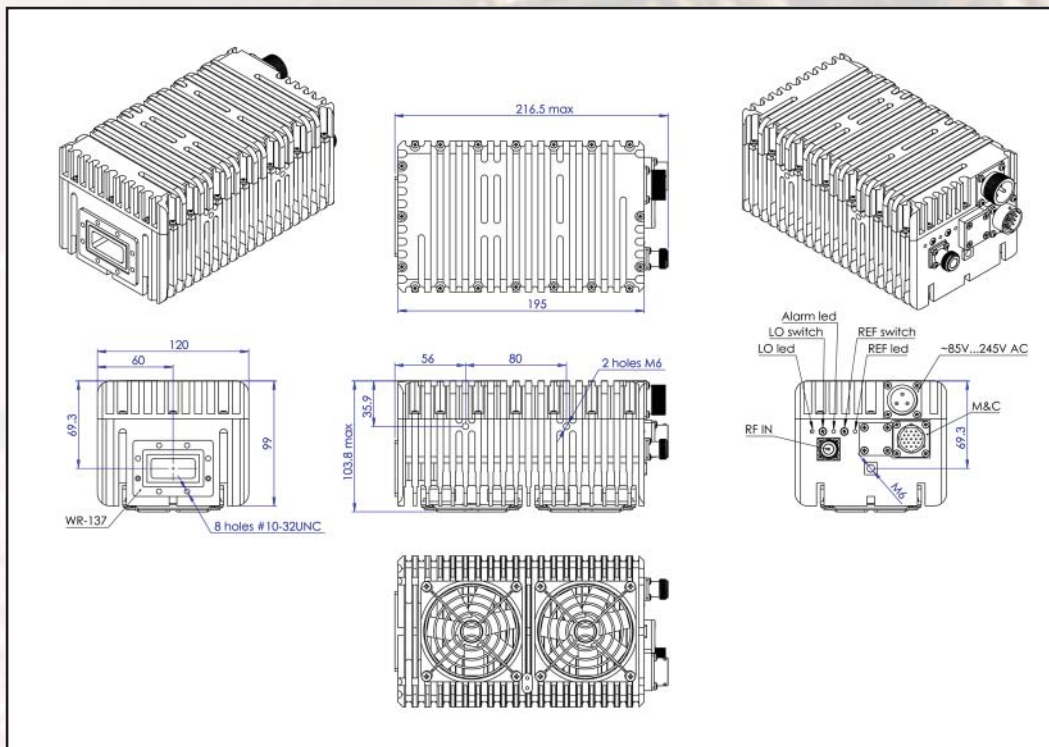



60W Full C-Band Block Up Converter

TECHNICAL SPECIFICATIONS	
RF frequency	5.850 to 7.05 GHz
Dual local oscillator	4.90 and 5.20 GHz
IF frequency	950 to 1,550 MHz
Output power	60W (+48 dBm min.), P-Linear 30.4W (44.8 dBm min.)
IF connector	N-type or F-type (field-exchangeable)
Power supply : auto-ranging via MS connector	+80 ~ +240 VAC, 189W max.
Output interface	CPR 137 G
Gain	68 dB nominal
IMD3 (two tones)	-28 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage	-45 dBm max
Spurious	-53 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation	± 1.1 dB over 40 MHz
TX Gain stability over temperature range	± 1.6 dB over full band ± 1.2 dB p_p @ fixed frequency
Phase noise (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 KHz -83 dBc/Hz max. @ 10 KHz -93 dBc/Hz max @ 100 KHz -113 dBc/Hz max @ 1 MHz
Noise power density	-66 dBm/Hz (max)
Transmit	-157 dBm/Hz (max)
Receive	
FSK	Multiplexed on TX IFL, compatible with Compech and Paradigm
M&C Interface	RS-232, RS-485 and Ethernet (HTTP and SNMP ver. 2 and 3)
Noise figure	15 dB max
Input V.S.W.R.	1.5 : 1 max
Output V.S.W.R.	1.5 : 1 max.
Mute	Shut off the HPA if L.O. unlocked
Status LED	Summary alarm
RED	All OK
GREEN	All OK standard L.O. 4.90 GHz
YELLOW	All OK standard L.O. 5.20 GHz
YELLOW blinking	
Temperature range (ambient)	
operating	-40 deg C to +65 deg C
storage	-55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E
Altitude	Up to 23,000 feet
Dimensions & housing	195 (L) x 120 (W) x 99 (H) mm 7.67" (L) x 4.72" (W) x 3.89" (H)
Weight	2.96 kg (6.5 lbs) max