




10W Ext. Low Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 12.75-13.50 GHz
- ◆ Double L.O. (switchable 11.80 & 12.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (45W max.) - can be powered by some iDirect or similar modems
- ◆ Extreme P-Out GaN linearity
- ◆ Auto-ranging powering option 15 - 60 VDC
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ L.O. lock and amplifier LEDs
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABE10KXHL / ABE10KXHLLF

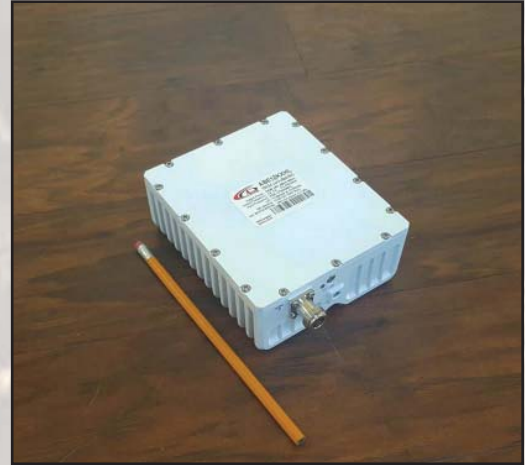

This smallest and lightest 10W L-To Low Ku-Band Block Up Converter is based on GaN technology. Double L.O. and field-exchangeable connector make unit universal for any Ku-Band application. Incomparable low power consumption allows the BUC to be powered by iDirect and similar modems. Internal 10MHz reference option enables using the BUC with the modems without 10MHz reference.

Mechanical Drawing

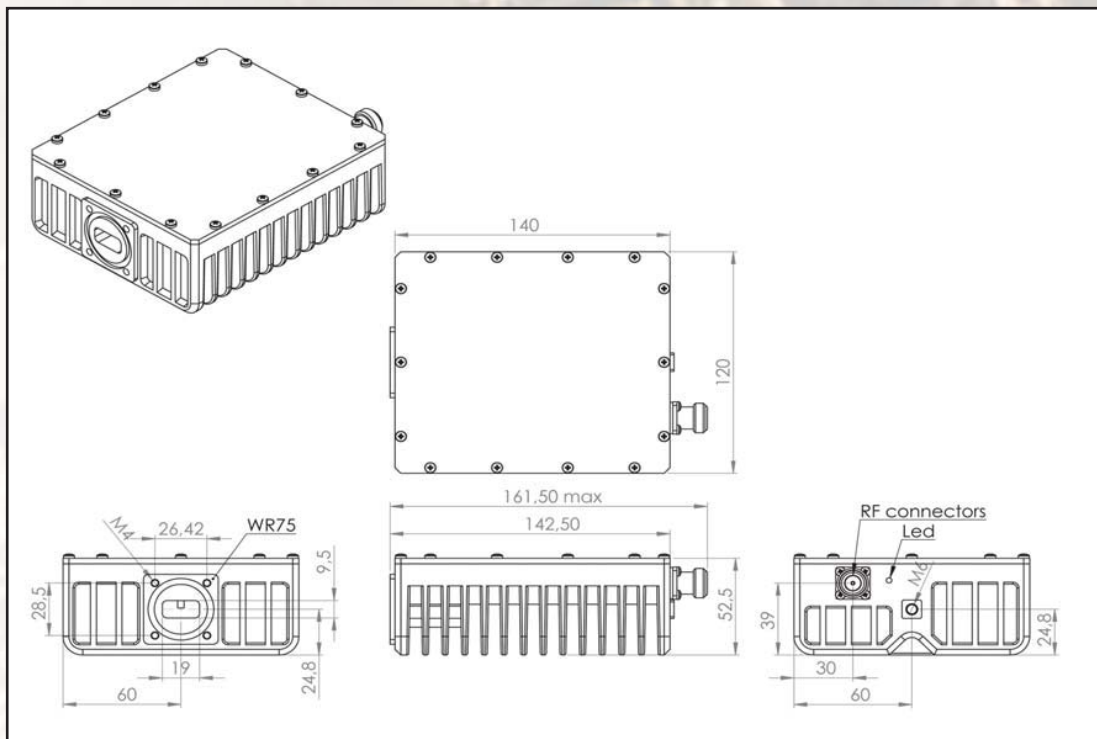



10W Ext. Low Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		12.75 to 13.50 GHz
Dual local oscillator		12.05 GHz and 11.80 GHz
IF frequency		950 to 1,700 MHz
Output power		10W (+40 dBm min)
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		+15 ~ +60 VDC via IF cable, 45W max.
Output interface		WR-75 G
Gain		62 dB typ.
IMD3 (two tones)		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-53 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference: frequency input power		via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)		-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 KHz -83 dBc/Hz max. @ 10 KHz -93 dBc/Hz max. @ 100 KHz -113 dBc/Hz max. @ 1 MHz
Noise power density	Transmit Receive	-60 dBm/Hz (max.) -150 dBm/Hz (max.)
Noise figure		20 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
Mute		Shut off the BUC in case of L.O. unlocked
Status LED		
Amplifier	RED	Summary alarm
	GREEN	All OK
L.O.	GREEN	All OK standard L.O. 12.05 GHz
	GREEN blinking	All OK extended L.O. 11.80 GHz
10MHz	GREEN	External 10MHz reference
	GREEN blinking	Internal 10MHz reference
	RED	No 10MHz reference detected
Temperature range (ambient) operating storage		-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
IP rating		IP67
Dimensions & housing		140 (L) x 120 (W) x 52.5 (H) mm 5.51" (L) x 4.72" (W) x 2.06" (H)
Weight		1.3 kg (2.9 lbs.) max.