



## 15W Full 5.85-7.025 GHz C-Band BUC

### KEY FEATURES


- ◆ Output frequency 5.850-7.025 GHz
- ◆ Double- L.O. (manually switchable 4.9 & 5.2 GHz)
- ◆ Lowest power consumption (58W at 41.8dBm)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ L.O., alarm, lock LED
- ◆ Built-in redundancy option
- ◆ RoHS compliant

### ABE15XCM / ABE15XCMF



This smallest and lightest 15W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. High power efficiency resulting in the low current (1.5 amps @ 24 VDC). The unit covers all three C-Band sub-bands: Standard (5.850-6.425 GHz), Palapa (6.365-6.725 GHz) and Insat (6.725-7.025 GHz).

### Mechanical Drawing

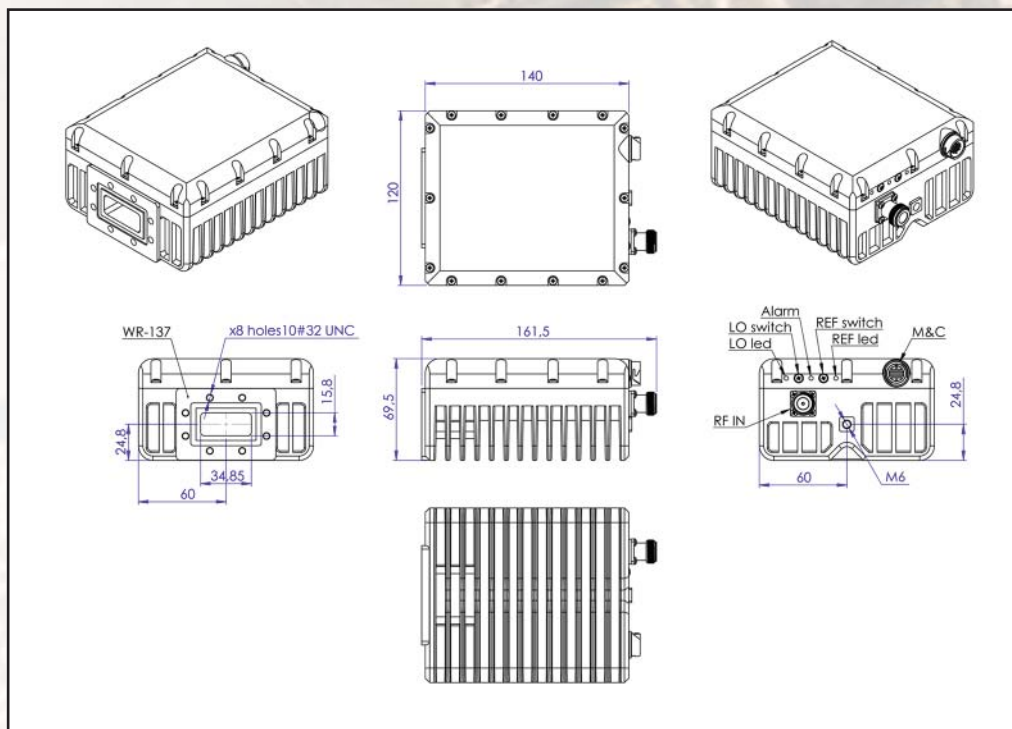



## 15W Full 5.85-7.025 GHz C-Band BUC

TECHNICAL SPECIFICATIONS	
<b>RF frequency</b>	5.850 to 7.025 GHz
<b>Dual local oscillator</b>	4.90 and 5.20 GHz
<b>IF frequency</b>	950 to 1,825 MHz
<b>Output power</b>	15W (+41.8 dBm min.)
<b>IF connector</b>	N-type or F-type (field-exchangeable)
<b>Power supply : auto-ranging via IF connector</b>	+15 VDC ~ +60 VDC via IF cable 58W max.
<b>Output interface</b>	CPR 137 G
<b>Gain</b>	60 dB nominal
<b>IMD3 (two tones)</b>	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
<b>L.O. leakage</b>	-45 dBm max
<b>Spurious</b>	-50 dBc max
<b>Spectral regrowth</b> (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
<b>Requirement for external reference:</b> frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
<b>TX Gain variation</b>	$\pm 0.5$ dB over 40 MHz
<b>TX Gain stability over temperature range</b>	$\pm 1.8$ dB over full band $\pm 1.5$ dB typ., $\pm 1.8$ dB max.
<b>Phase noise</b>  (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz
	-63 dBc/Hz max. @ 100 Hz
	-73 dBc/Hz max. @ 1 KHz
	-83 dBc/Hz max. @ 10 KHz
	-93 dBc/Hz max @ 100 KHz
	-113 dBc/Hz max @ 1 MHz
<b>Noise power density</b>	<b>Transmit</b> -66 dBm/Hz (max)
	<b>Receive</b> -157 dBm/Hz (max)
<b>M&amp;C Interface</b>	RS-232, RS-485 and Ethernet (HTTP and SNMP ver. 3)
<b>Noise figure</b>	15 dB max
<b>Input V.S.W.R.</b>	1.5 : 1 max
<b>Output V.S.W.R.</b>	1.5 : 1 max.
<b>Mute</b>	Shut off the HPA if L.O. unlocked
<b>Status LED</b>	<b>RED</b> <b>GREEN</b> <b>YELLOW</b> <b>YELLOW blinking</b>
	Summary alarm All OK All OK standard L.O. 4.90 GHz All OK extended L.O. 5.20 GHz
<b>Temperature range (ambient)</b>	
operating	-40 deg C to +55 deg C
storage	-55 deg C to +85 deg C
<b>Vibration and shock</b>	Complies with MIL-STD-810E
<b>Dimensions &amp; housing</b>	140(L) x 120 (W) x 69.5 (H) mm  5.51" (L) x 4.72" (W) x 2.78" (H)
<b>Weight</b>	1.2 kg (2.6 lbs) max