



16W Ext. Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 13.75-14.50 GHz
- ◆ Double- L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (92W max.)
- ◆ Auto-ranging powering option 15 - 60 VDC
- ◆ Internal 10MHz high stability reference (optional)
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Built-in redundancy option
- ◆ RoHS compliant

ABE16KX / ABE16KXF



This smallest and lightest 16W L-To Ku-Band Block Up Converter is based on GaN technology. Incomparable low power consumption, double L.O., field-exchangeable connector, internal 10 MHz reference, and it is powered either with 24 or 48 VDC and consumes less than 92W. The unit is ideal for portable and mobile applications.

Mechanical Drawing

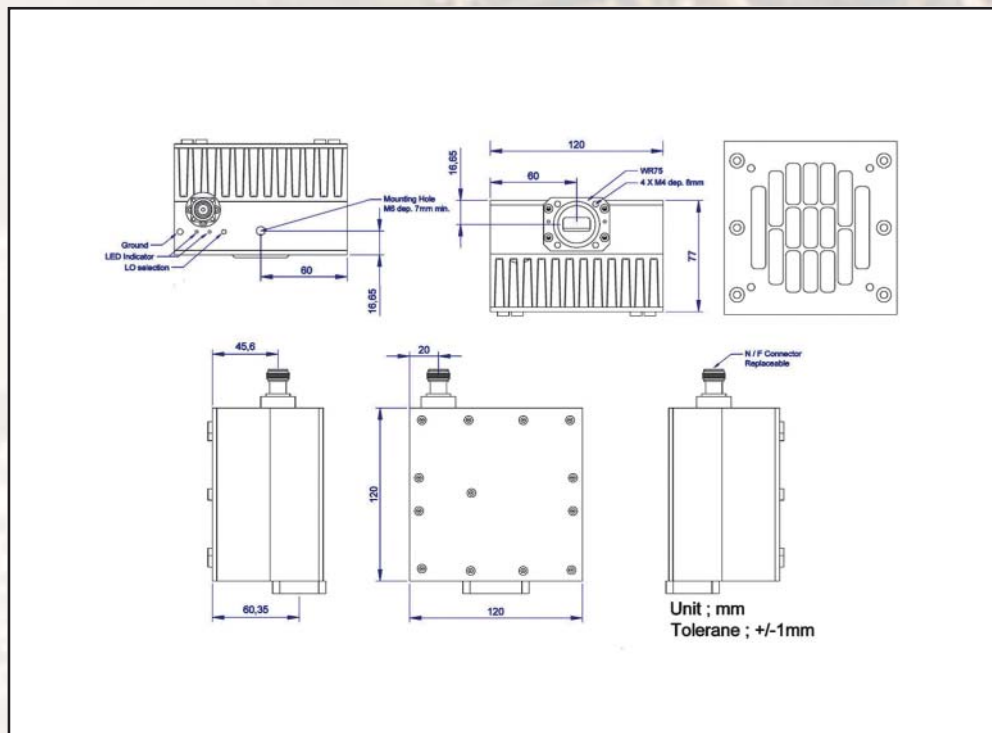



16W Ext. Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS	
RF frequency	14.00 to 14.50 GHz 13.75 to 14.50 GHz
Dual local oscillator	13.05 GHz and 12.80 GHz
IF frequency	950 to 1,700 MHz
Output power	16W (+42 dBm min.), P-Linear 8.2W (+39.1 dBm min.)
IF connector	N-type or F-type (field-exchangeable)
Power supply auto-ranging	+15 ~ +60 VDC via IF cable, 92W typ.
Output interface	WR-75 G
Gain	65 dB min., 68 dB nominal
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage	-45 dBm max
Spurious	-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)	-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max @ 100 KHz -115 dBc/Hz max @ 1 MHz
Noise power density	Transmit -80 dBm/Hz (max) Receive -125 dBm/Hz (max)
Noise figure	15 dB max
Input V.S.W.R.	1.5 : 1 max
Output V.S.W.R.	1.5 : 1 max.
M&C	RS-232, RS-485 and Ethernet (HTTP and SNMP ver. 3)
Mute	Shut off the HPA if L.O. unlocked
Status LED RED GREEN YELLOW YELLOW blinking	Summary alarm All OK All OK standard L.O. 13.05 GHz All OK extended L.O. 12.80 GHz
Temperature range (ambient) operating storage	-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E
Dimensions & housing	120 (L) x 120 (W) x 77 (H) mm 4.72" (L) x 4.72" (W) x 3.03" (H)
Weight	1.8 kg (4.0 lbs) max