



50W Ext. 5.85-6.725 GHz C-Band BUC

KEY FEATURES


- ◆ Output frequency 5.850 GHz - 6.725 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Local oscillator 4.90 GHz
- ◆ Incomparable low power consumption (184W max.)
- ◆ Advanced M&C - combined RS-232/485 and optional FSK, Ethernet control (HTTP and SNMP ver.2 and 3)
- ◆ Auto-ranging powering option 18 - 75 VDC
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Built-in redundancy option
- ◆ Internal auto-sensing and controllable 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABE50DC / ABE50DCF



This smallest and lightest 50W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. The unit covers C-Band sub-bands: Standard (5.850-6.425 GHz) and Palapa(6.365-6.725 GHz).

Mechanical Drawing

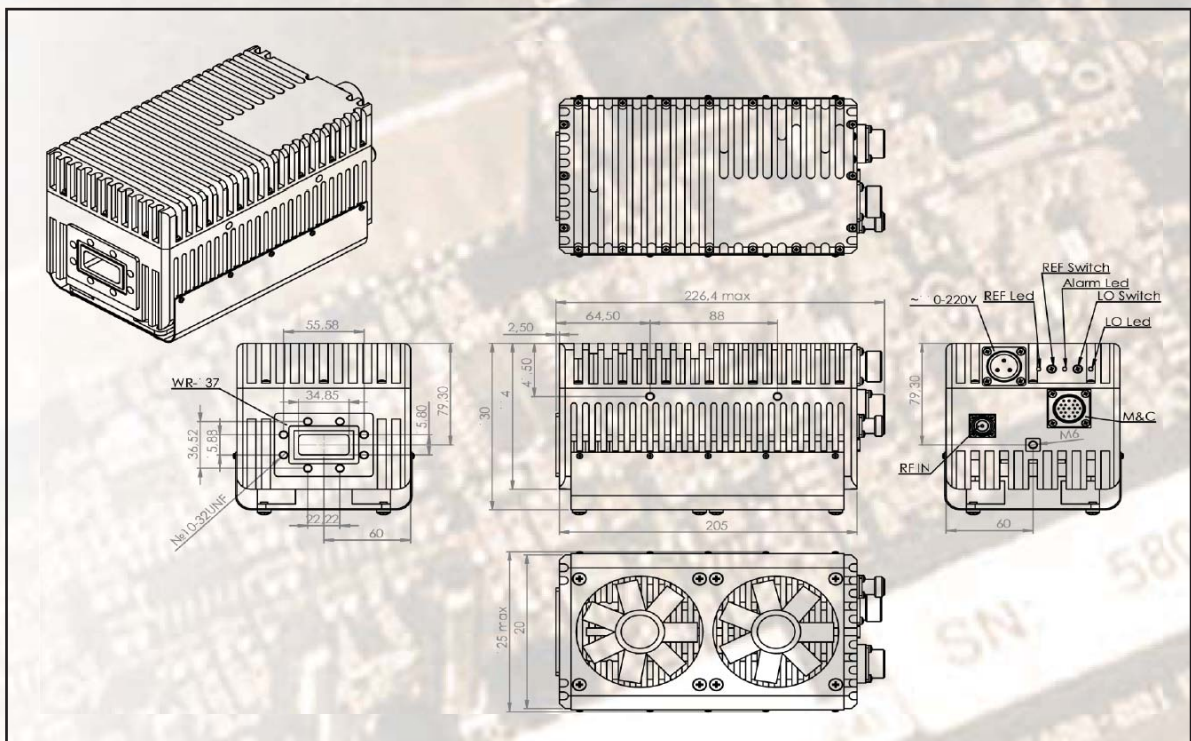



50W Ext. 5.85-6.725 GHz C-Band BUC

TECHNICAL SPECIFICATIONS		
RF frequency		5.850 to 6.725 GHz
Local oscillator		4.90 GHz
IF frequency		950 to 1,850 MHz
Output power		50W typ. (+47 dBm min.) 25.1W (+44 dBm min.) P-linear
IF connector		N-type or F-type (field-exchangeable)
Power supply : auto-ranging via MS connector		+18 ~ +75 VDC, 184W max.
Output interface		CPR 137 G
Gain		68 dB nominal
IMD3		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-50 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:		via IF cable
frequency		10 MHz (sine-wave)
input power		-5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise		-55 dBc/Hz max. @ 10 Hz
(Exceeds Intelsat's standard IESS308/309)		-65 dBc/Hz max. @ 100 Hz
		-75 dBc/Hz max. @ 1 KHz
		-85 dBc/Hz max. @ 10 KHz
		-95 dBc/Hz max. @ 100 KHz
		-115 dBc/Hz max @ 1 MHz
Noise power density	Transmit	-66 dBm/Hz (max.)
	Receive	-157 dBm/Hz (max.)
Noise figure		15 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
M&C Interface		RS-232 and RS-485, Ethernet (HTTP and SNMP ver.2 and 3)
FSK		Multiplexed on TX IFL, com. with Comtech/ Paradigm
Mute		Shut off the HPA if L.O. unlocked
Status LED		Summary alarm
Amplifier	RED	All OK
	GREEN	All OK L.O. is set to 4.9 GHz
L.O.	GREEN	External 10MHz reference
10MHz	GREEN	Internal 10MHz reference
	GREEN blinking	No 10MHz reference detected
	RED	
Temperature range (ambient)		-40 deg C to +55 deg C
operating		-55 deg C to +85 deg C
storage		
Vibration and shock		Complies with MIL-STD-810E
Altitude		Up to 23,000 feet
IP rating		IP67
Dimensions & housing		205 (L) x 120 (W) x 130 (H) mm 8.07"(L) x 4.72"(W) x 5.12" (H)
Weight		3.08 kg (6.8 lbs) max.