




8W Full 5.85-7.025 GHz C-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 5.85-7.025 GHz
- ◆ Double- L.O. (switchable 4.9 & 5.2 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (28W max.)
- ◆ Auto-ranging powering option 15-60 VDC
- ◆ High power efficiency
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ Power and lock status LED
- ◆ RoHS compliant
- ◆ Three-year warranty

ABE8XC / ABE8XCF

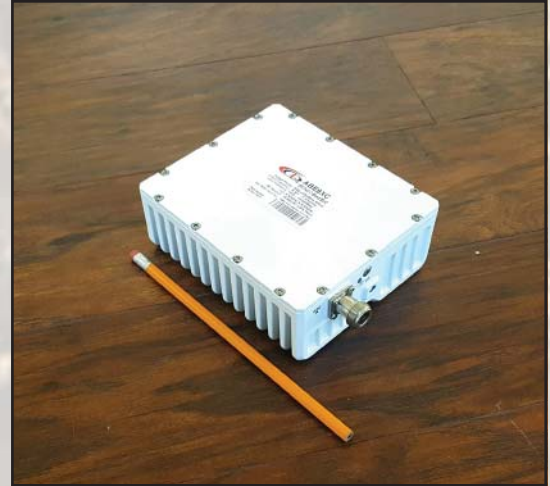

This smallest and lightest 8W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. High power efficiency resulting in the low current (<1.15 amps @ 24VDC). The unit covers all three C-Band sub-bands: Standard (5.85-6.425GHz), Palapa (6.365-6.725 GHz) and Insat (6.725-7.025 GHz).

Mechanical Drawing

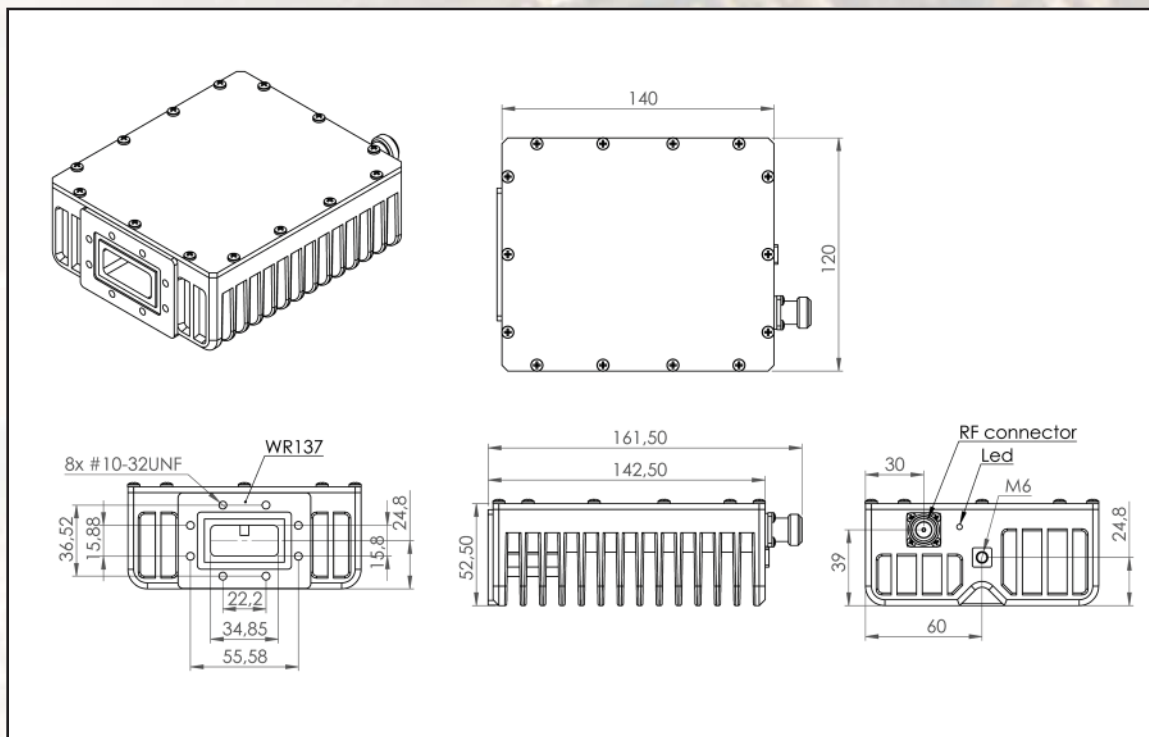



8W Full 5.85-7.025 GHz C-Band Block Up Converter

TECHNICAL SPECIFICATIONS	
RF frequency	5.850 to 7.025 GHz
Dual local oscillator	4.90 and 5.20 GHz
IF frequency	950 to 1,825 MHz
Output power	8W (+39 dBm min.)
IF connector	N-type or F-type (field-exchangeable)
Power supply : auto-ranging via IF connector	+15 VDC ~ +60 VDC via IF cable 28W max.
Output interface	CPR 137 G
Internal 10MHz high stability reference	10 ⁻⁸
Gain	68 dB nominal
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage	-45 dBm max
Spurious	-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 KHz -83 dBc/Hz max. @ 10 KHz -93 dBc/Hz max @ 100 KHz -113 dBc/Hz max @ 1 MHz
Noise power density	Transmit Receive
	-66 dBm/Hz (max) -157 dBm/Hz (max)
Noise figure	15 dB max
Input V.S.W.R.	1.5 : 1 max
Output V.S.W.R.	1.5 : 1 max.
Mute	Shut off the HPA if L.O. unlocked
Status LED	RED GREEN YELLOW YELLOW blinking
	Summary alarm All OK All OK standard L.O. 4.90 GHz All OK extended L.O. 5.20 GHz
Temperature range (ambient)	
operating	-40 deg C to +55 deg C
storage	-55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E
Dimensions & housing	142.5 (L) x 120 (W) x 52.5 (H) mm 5.61" (L) x 4.72" (W) x 2.06" (H)
Weight	1 kg (2.2 lbs) max