



40W Ext. Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 13.75-14.50 GHz
- ◆ Double L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (199W max.)
- ◆ Auto-ranging powering option 80 - 240 VAC
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Amplifier, L.O. and 10 MHz Reference Status LEDs
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Built-in redundancy option
- ◆ Internal auto-sensing and controllable high stability 10MHz reference (optional)
- ◆ RoHS compliant

ABDN40KX / ABDN40KXF



This smallest and lightest 40W L-To Ku-Band Block Up Converter is based on GaN technology. Incomparable low power consumption, double L.O., field-exchangeable connector, auto-sensing and controllable internal 10 MHz reference make this unit universal for any Ku-Band application. AC Built-in power and consumes less than 199W.

Mechanical Drawing

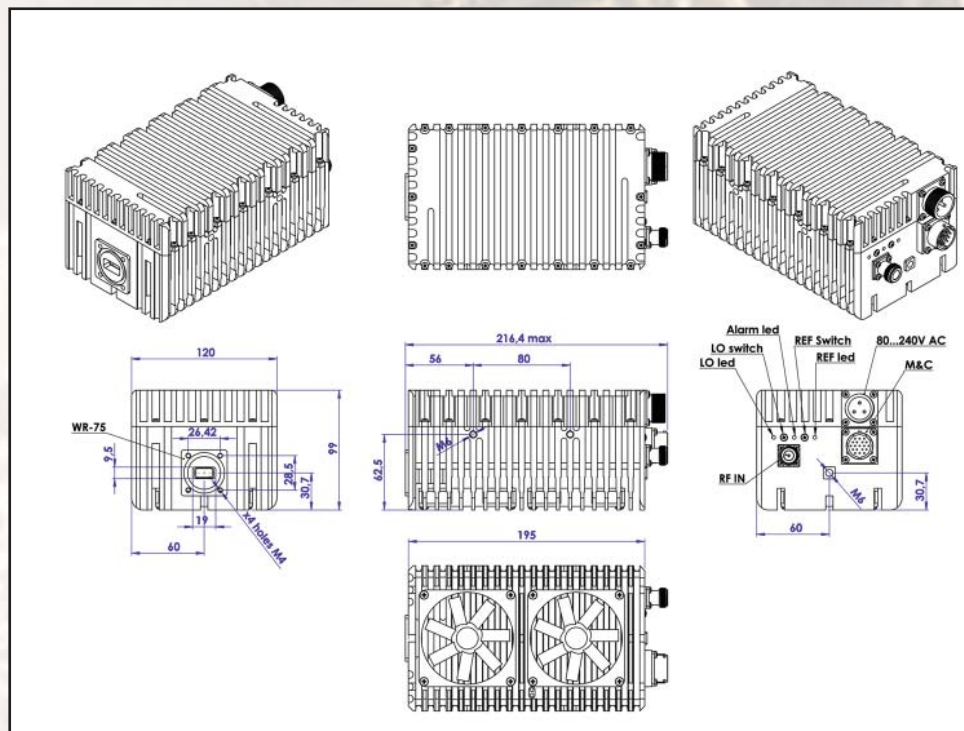



40W Ext. Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		14.00 to 14.50 GHz 13.75 to 14.50 GHz
Dual local oscillator		13.05 GHz and 12.80 GHz
IF frequency		950 to 1,700 MHz
Output power		40W (+46 dBm min), P-Linear 21.4W (+43.3 dBm min)
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		80 ~ 240 VAC via MS connector, 199W max.
Output interface		WR-75 G
Gain		70 dB typ.
IMD3 (two tones)		-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-50 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference: frequency input power		via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)		-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max. @ 100 KHz -115 dBc/Hz max. @ 1 MHz
Noise power density	Transmit Receive	-80 dBm/Hz (max.) -125 dBm/Hz (max.)
Noise figure		15 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
M&C		RS-232 and RS-485, Ethernet (HTTP and SNMP), FSK
Mute		Shut off the HPA if L.O. unlocked
Status LED Amplifier L.O. 10MHz	RED GREEN GREEN GREEN blinking GREEN GREEN blinking RED	Summary alarm All OK All OK standard L.O. 13.05 GHz All OK extended L.O. 12.80 GHz External 10MHz reference Internal 10MHz reference No 10MHz reference detected
Temperature range (ambient) operating storage		-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
IP rating		IP67
Dimensions & housing		195 (L) x 120 (W) x 99 (H) mm 7.67" (L) x 4.72" (W) x 3.9" (H)
Weight		2.95 kg (6.50 lbs) max.