



8W Low Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 12.75 - 13.50 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Double- L.O. (switchable 11.80 & 12.05 GHz)
- ◆ Incomparable low power consumption (47W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Built-in redundancy option
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABE8KXHLM / ABE8KXHLMF



This smallest and lightest 8W L-To Low Ku-Band Block Up Converter is based on GaN technology. Double L.O. and field- Exchangeable connector make unit universal for any Low Ku-Band application. Incomparable low power consumption allows the BUC to be powered by iDirect and similar modems. Internal 10MHz reference option enables using the BUC with the modems without 10MHz reference.

Mechanical Drawing

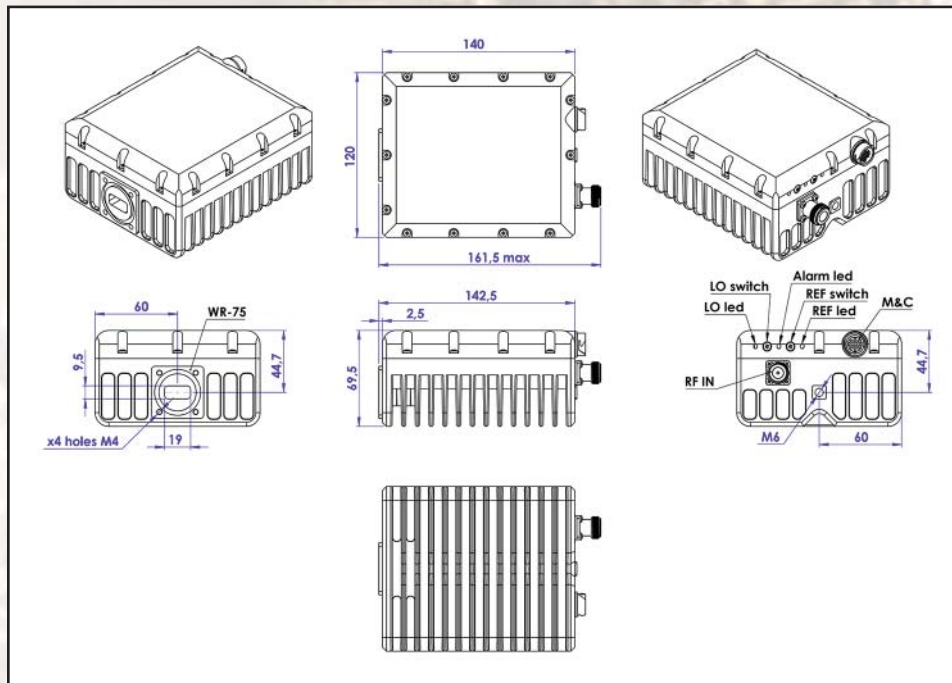



8W Low Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency	12.75 - 13.50 GHz	
Dual local oscillator	11.80 and 12.05 GHz	
IF frequency	950 to 1,700 MHz	
Output power	8W (+39 dBm min.)	
IF connector	N-type or F-type (field-exchangeable)	
Power supply : auto-ranging via IF connector	+15 VDC ~ +60 VDC, 47W max.	
Output interface	WR 75 G	
Gain	62 dB nominal	
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR	
L.O. leakage	-45 dBm max	
Spurious	-50 dBc max	
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc	
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port	
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band	
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.	
Phase noise (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz	
	-63 dBc/Hz max. @ 100 Hz	
	-73 dBc/Hz max. @ 1 KHz	
	-83 dBc/Hz max. @ 10 KHz	
	-93 dBc/Hz max @ 100 KHz	
		-113 dBc/Hz max @ 1 MHz
Noise power density	Transmit	-66 dBm/Hz (max)
	Receive	-157 dBm/Hz (max)
FSK	Multiplexed on TX IFL, compatible with Comtech and Paradigm	
M&C Interface	RS-232, RS-485 and Ethernet (HTTP and SNMP ver. 3)	
Noise figure	15 dB max	
Input V.S.W.R.	1.5 : 1 max	
Output V.S.W.R.	1.5 : 1 max.	
Mute	Shut off the HPA if L.O. unlocked	
Status LED	RED GREEN YELLOW YELLOW blinking	Summary alarm All OK All OK standard L.O. 12.05 GHz All OK extended L.O. 11.80 GHz
Temperature range (ambient)	operating	-40 deg C to +55 deg C
	storage	-55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E	
Dimensions & housing	140 (L) x 120 (W) x 69.5 (H) mm	
	5.51" (L) x 4.72" (W) x 2.78" (H)	
Weight	1.2 kg (2.6 lbs) max	